

Features


- 30V/230A,
 $R_{DS(ON)} = 0.9m\Omega(Typ.)@V_{GS}=10V$
 $R_{DS(ON)} = 1.3m\Omega(Typ.)@V_{GS}=4.5V$
- Excellent $Q_G \times R_{DS(on)}$ product(FOM)
- SGT Technology
- High Ruggedness
- 100% avalanche tested

Applications

- DC/DC Converter
- High Frequency Switching and Synchronous Rectification



Pin Description

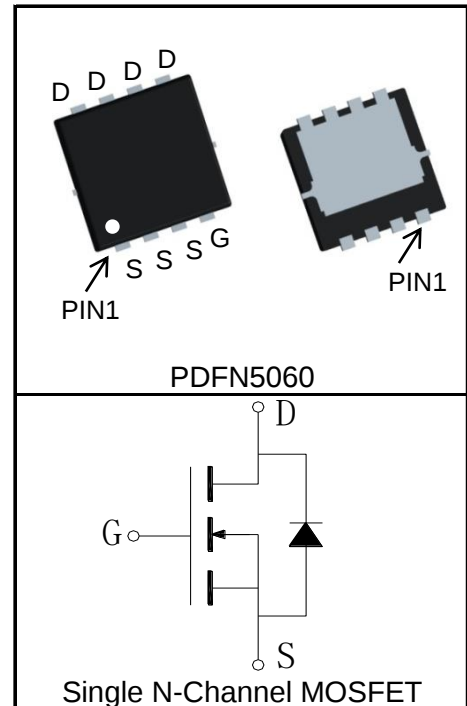

Absolute Maximum Ratings

Symbol	Parameter		Rating	Unit
Common Ratings (T _C =25°C Unless Otherwise Noted)				
V _{DSS}	Drain-Source Voltage		30	V
V _{GSS}	Gate-Source Voltage		±20	
T _J	Maximum Junction Temperature		150	°C
T _{STG}	Storage Temperature Range		-55 to 150	°C
I _S	Diode Continuous Forward Current	T _C =25°C	230	A
Mounted on Large Heat Sink				
I _{DP} ^①	300μs Pulse Drain Current Tested	T _C =25°C	920	A
I _D ^②	Continuous Drain Current@T _C (V _{GS} =10V)	T _C =25°C	230	A
		T _C =100°C	145	
	Continuous Drain Current@T _A (V _{GS} =10V) ^③	T _A =25°C	45	
		T _A =70°C	36	
P _D	Maximum Power Dissipation@T _C	T _C =25°C	108	W
		T _C =100°C	43	
	Maximum Power Dissipation@T _A ^③	T _A =25°C	4.2	
		T _A =70°C	2.7	

Symbol	Parameter	Rating	Unit
$R_{\theta JC}$	Thermal Resistance-Junction to Case	1.16	$^{\circ}\text{C/W}$
$R_{\theta JA}^{(3)}$	Thermal Resistance-Junction to Ambient	30	$^{\circ}\text{C/W}$
Drain-Source Avalanche Ratings			
$E_{AS}^{(4)}$	Avalanche Energy, Single Pulsed	225	mJ

Electrical Characteristics ($T_C=25^{\circ}\text{C}$ Unless Otherwise Noted)


Symbol	Parameter	Test Condition	KS32026NAT			Unit
			Min.	Typ.	Max.	
Static Characteristics						
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _{DS} =250μA	30			V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =30V, V _{GS} =0V			1	μA
		T _J =125°C			30	
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _{DS} =250μA	1.1	1.6	2.3	V
I _{GSS}	Gate Leakage Current	V _{GS} =±20V, V _{DS} =0V			±100	nA
R _{DS(ON)} ⑤	Drain-Source On-state Resistance	V _{GS} =10V, I _{DS} =20A		0.9	1.2	mΩ
		V _{GS} =4.5V, I _{DS} =16A		1.3	1.8	mΩ
Diode Characteristics						
V _{SD} ⑤	Diode Forward Voltage	I _{SD} =20A, V _{GS} =0V		0.74	1.2	V
t _{rr}	Reverse Recovery Time	I _{SD} =20A, dI _{SD} /dt=100A/μs		33		ns
Q _{rr}	Reverse Recovery Charge			50		nC
Dynamic Characteristics ⑥						
R _G	Gate Resistance	V _{GS} =0V, V _{DS} =0V, F=1MHz		1.2		Ω
C _{iss}	Input Capacitance	V _{GS} =0V, V _{DS} =15V, Frequency=1.0MHz		4985		pF
C _{oss}	Output Capacitance			1650		
C _{rss}	Reverse Transfer Capacitance			65		
t _{d(ON)}	Turn-on Delay Time	V _{DD} =15V, I _{DS} =20A, V _{GS} =10V, R _G =3Ω		15		ns
t _r	Turn-on Rise Time			44		
t _{d(OFF)}	Turn-off Delay Time			69		
t _f	Turn-off Fall Time			30		
Gate Charge Characteristics ⑥						
Q _g	Total Gate Charge	V _{DS} =15V, V _{GS} =10V, I _{DS} =20A		90		nC
Q _{gs}	Gate-Source Charge			15		
Q _{gd}	Gate-Drain Charge			22		

Notes:

- ①Pulse width limited by safe operating area.
- ②Calculated continuous current based on maximum allowable junction temperature. The package limitation current is 50A.
- ③When mounted on 1 inch square copper board, $t \leq 10\text{sec}$.
- ④Limited by T_{Jmax} , $I_{AS} = 30\text{A}$, $L = 0.5\text{mH}$, $V_{DD} = 35\text{V}$, $R_G = 25\Omega$, Starting $T_J = 25^\circ\text{C}$, 100% tested and guaranteed.
- ⑤Pulse test; Pulse width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$.
- ⑥Guaranteed by design, not subject to production testing.

Ordering and Marking Information

Device	Package	Packaging	Quantity	Reel Size	Tape width
KS32026NAT	PDFN5060	Tape&Reel	5000	13"	12mm





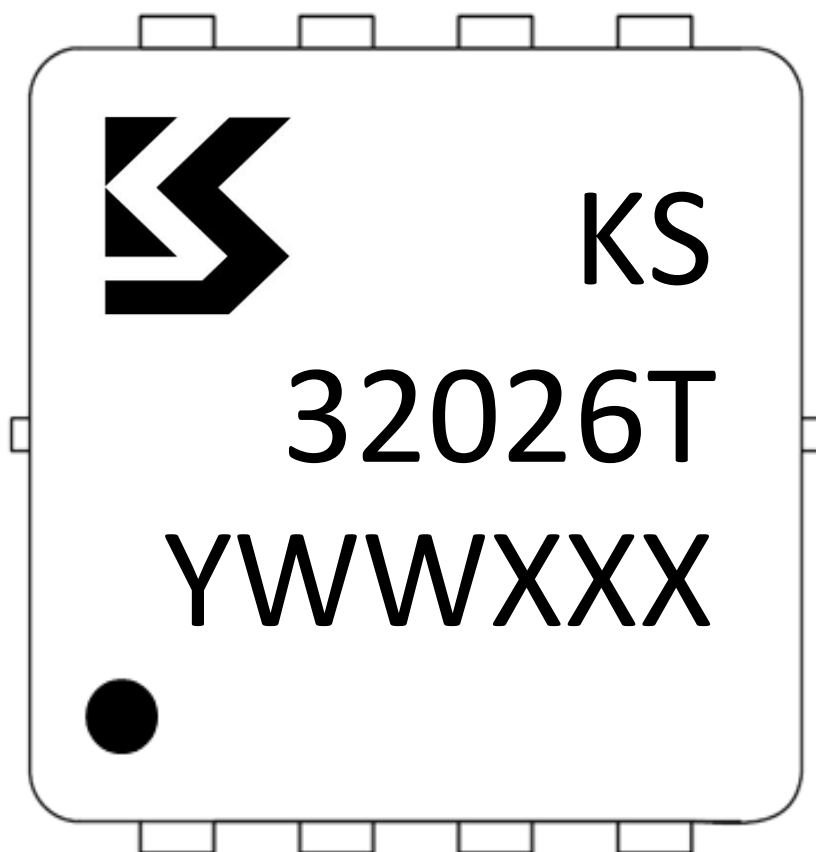


1st Line: Kwansemi LOGO, Kwansemi Code(KS)







2nd Line: Part Number(32026T)





3rd Line: Lot Number(YWWXXX)

Typical Characteristics

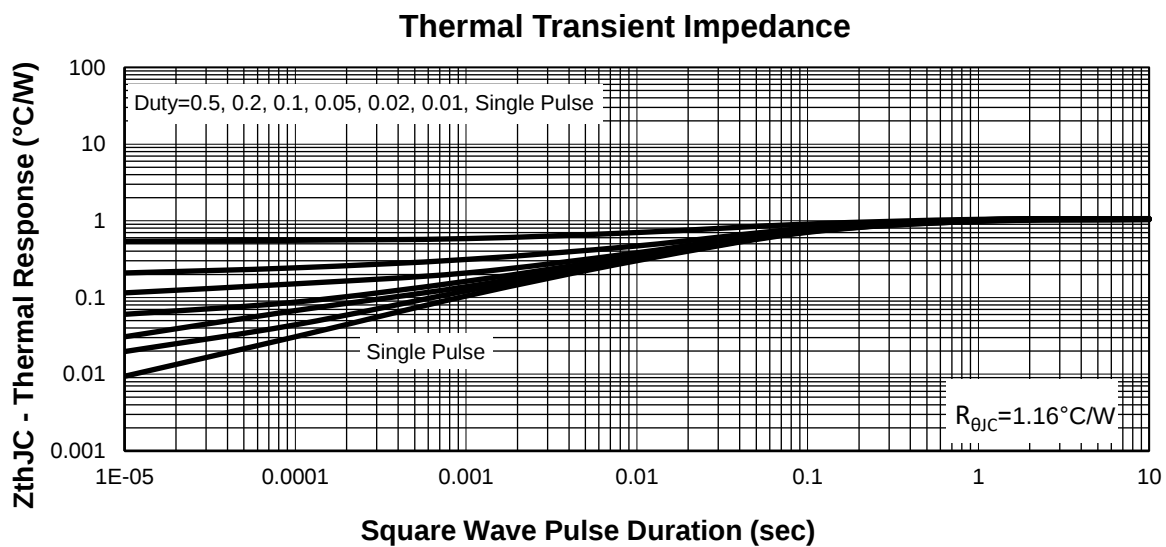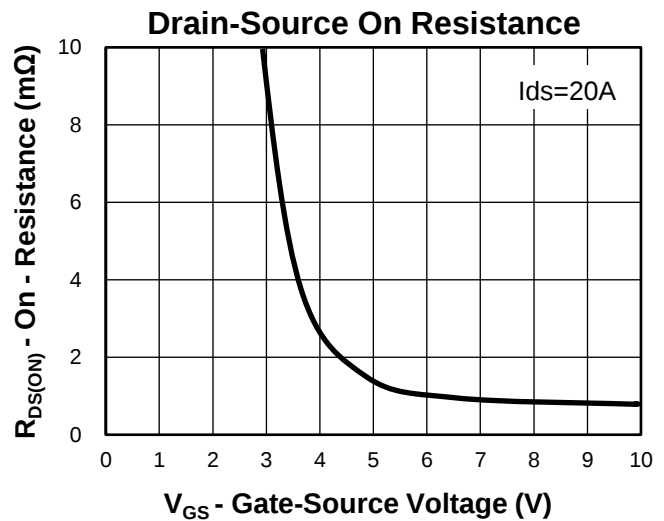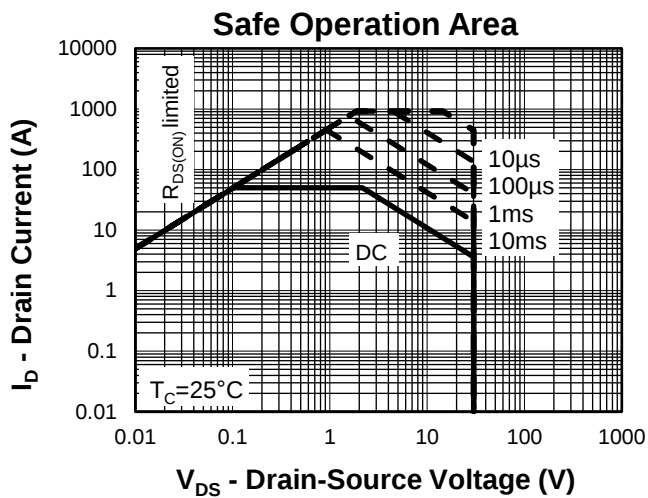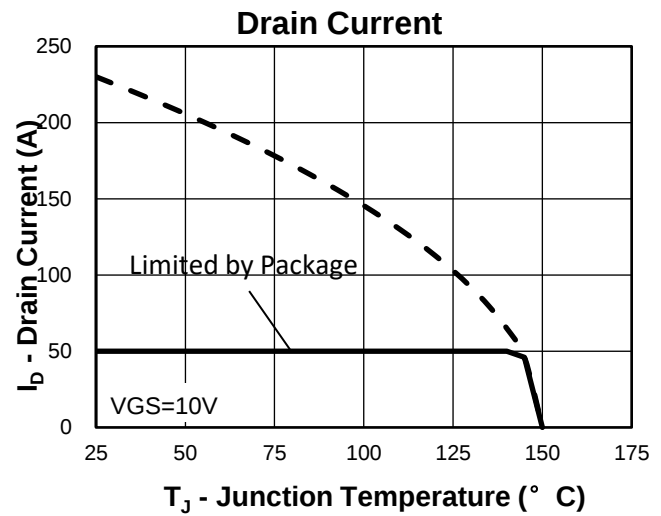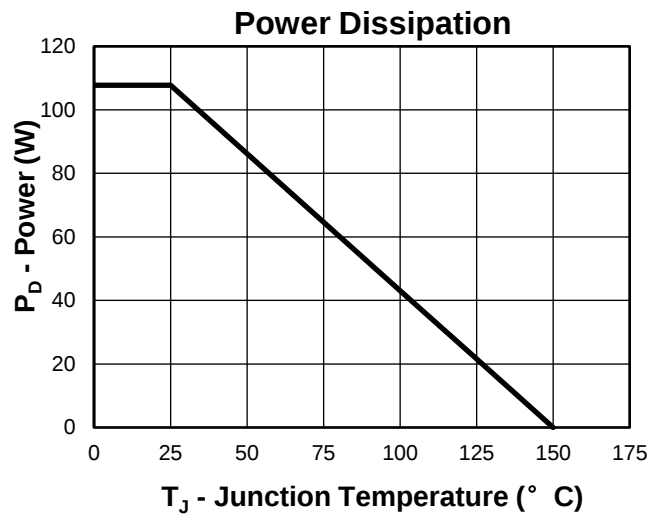


Typical Characteristics

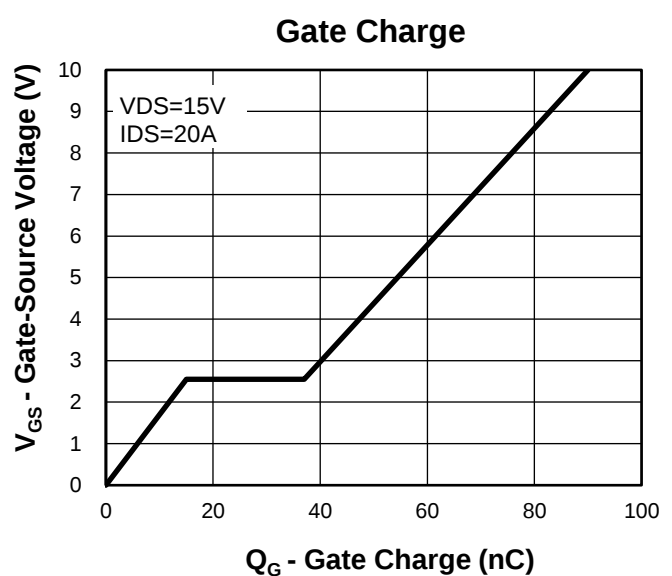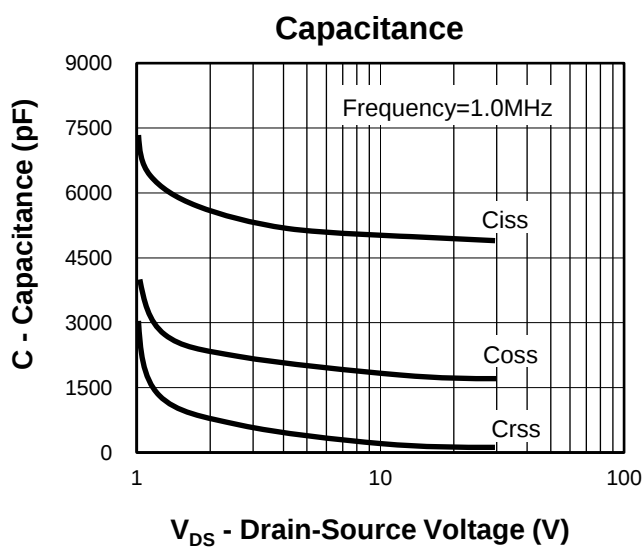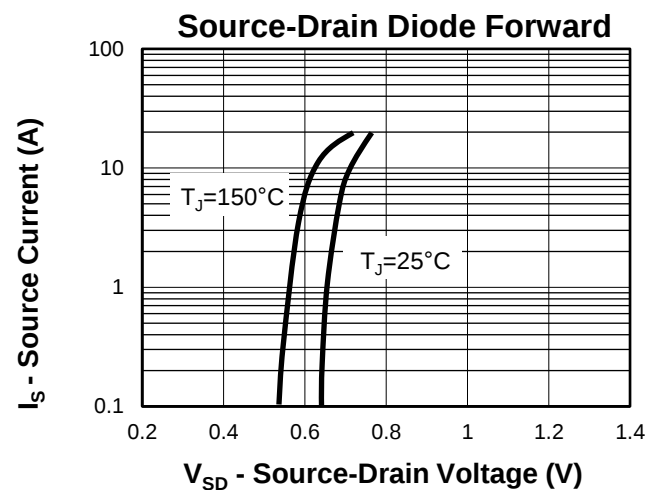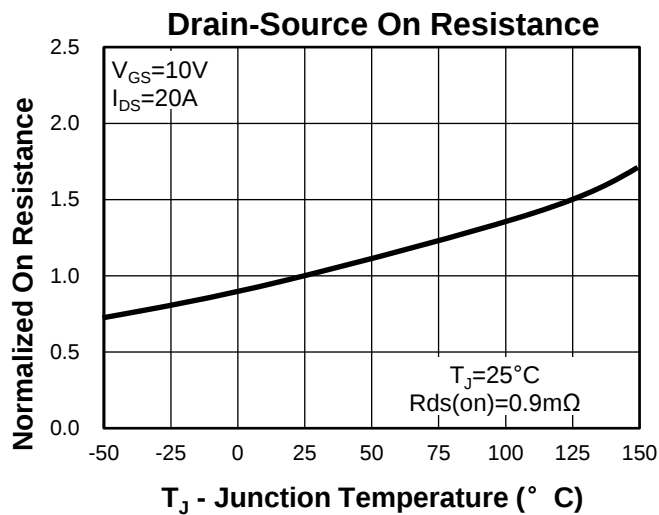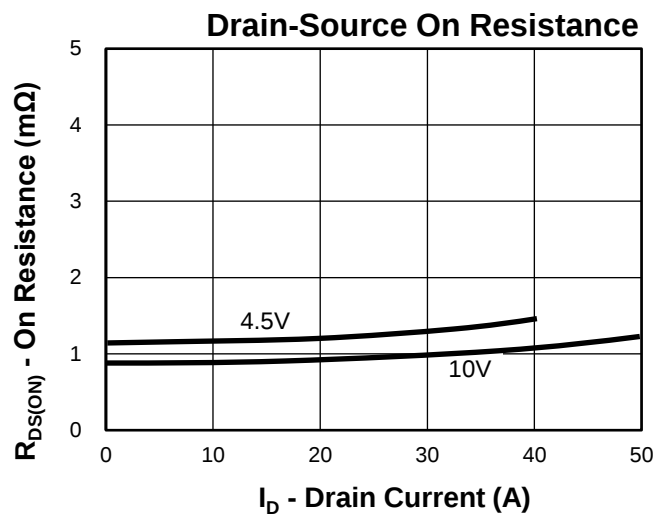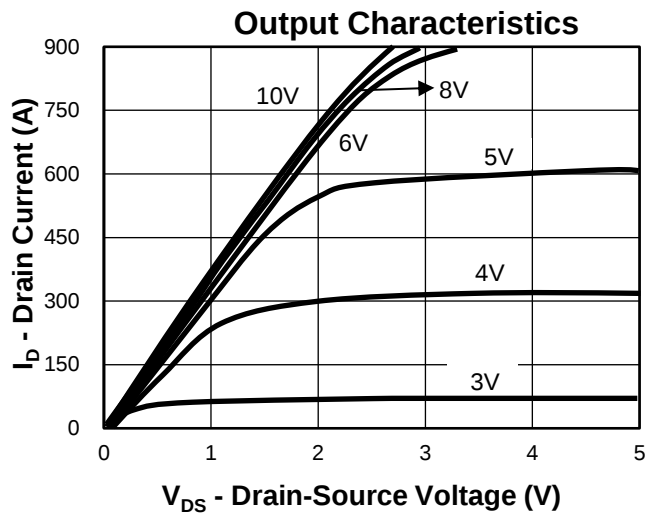

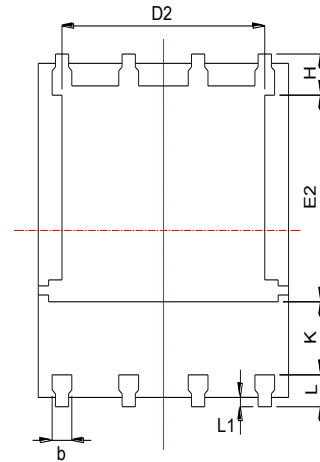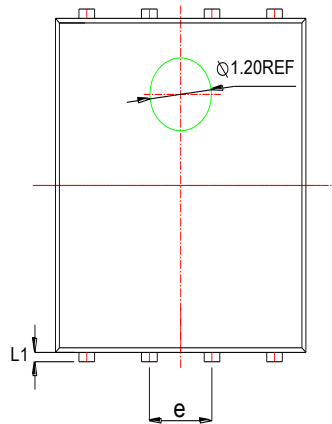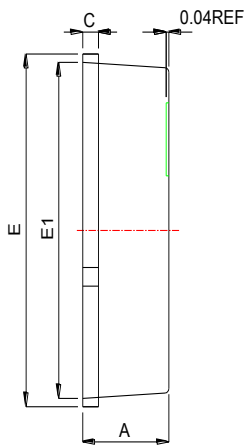Package Information
PDFN5060


Land Pattern
(Only for Reference)

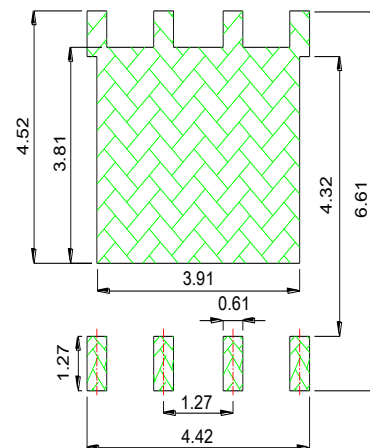

SYMBOL	MM			INCH		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.90	1.00	1.10	0.035	0.039	0.043
b	0.33	0.42	0.51	0.013	0.017	0.020
c	0.20	0.25	0.30	0.008	0.010	0.012
D1	4.80	4.90	5.00	0.189	0.193	0.197
D2	3.61	3.79	3.96	0.142	0.149	0.156
E	5.90	6.00	6.10	0.232	0.236	0.240
E1	5.65	5.75	5.85	0.222	0.226	0.230
E2	3.38	3.58	3.78	0.133	0.141	0.149
e	1.27 BSC			0.050 BSC		
H	0.41	0.51	0.61	0.016	0.020	0.024
k	1.10			0.043		
L	0.51	0.61	0.71	0.020	0.024	0.028
L1	0.06	0.13	0.20	0.002	0.005	0.008
a	0°		12°	0°		12°

Avalanche Test Circuit and Waveforms



Switching Time Test Circuit and Waveforms



Diode Recovery Test Circuit and Waveforms



Gate Charge Test Circuit and Waveform



Customer Service

Kwansemi Semiconductor Co., Ltd

Email: Sales@kwansemi.com

Web: www.kwansemi.com

DISCLAIMER:

Kwansemi reserves the right to change the specifications and circuitry without notice at any time. The Products are not designed for use in hostile environments, including, without limitation, aircraft, nuclear power generation, medical appliances, and devices or systems in which malfunction of any Product can reasonably be expected to result in a personal injury. Seller's customers using or selling Seller's products for use in such applications do so at their own risk and agree to fully defend and indemnify Seller.