

Features


- N-Channel
40V/7A,
 $R_{DS(ON)} = 18m\Omega (Typ.) @ V_{GS}=10V$
 $R_{DS(ON)} = 24m\Omega (Typ.) @ V_{GS}=4.5V$
- P-Channel
-40V/-5A,
 $R_{DS(ON)} = 45m\Omega (Typ.) @ V_{GS}=-10V$
 $R_{DS(ON)} = 60m\Omega (Typ.) @ V_{GS}=-4.5V$
- Very low on-resistance
- Fast Switching

Applications

- Load Switch



Pin Description

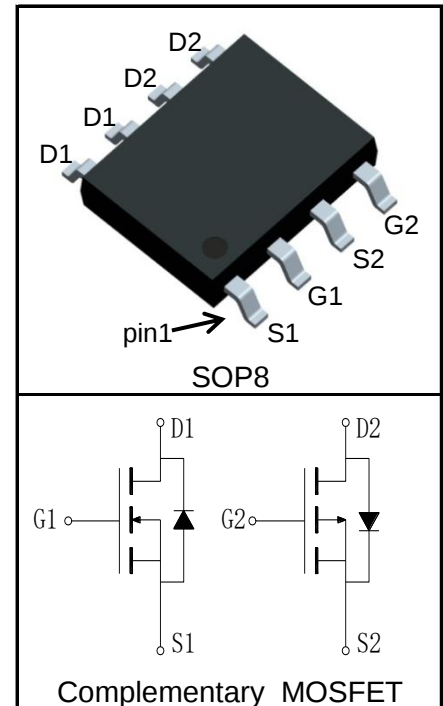

Absolute Maximum Ratings

Symbol	Parameter		N-Channel	P-Channel	Unit
Common Ratings (T _A =25°C Unless Otherwise Noted)					
V _{DSS}	Drain-Source Voltage		40	-40	V
V _{GSS}	Gate-Source Voltage		±20	±20	
T _J	Maximum Junction Temperature		150	150	°C
T _{STG}	Storage Temperature Range		-55 to 150	-55 to 150	°C
I _S	Diode Continuous Forward Current	T _A =25°C	1.6	-1.6	A
Mounted on Large Heat Sink					
I _{DP} ^①	300μs Pulse Drain Current Tested	T _A =25°C	28	-20	A
I _D ^②	Continuous Drain Current(V _{GS} =±10V)	T _A =25°C	7	-5	A
		T _A =70°C	5.6	-4	
P _D	Maximum Power Dissipation	T _A =25°C	2	2	W
		T _A =70°C	1.3	1.3	
R _{θJL}	Thermal Resistance-Junction to Lead		40	40	°C/W
R _{θJA} ^③	Thermal Resistance-Junction to Ambient		62.5	62.5	°C/W
Drain-Source Avalanche Ratings					
E _{AS} ^④	Avalanche Energy, Single Pulsed		12	16	mJ

Electrical Characteristics ($T_A=25^{\circ}\text{C}$ Unless Otherwise Noted)

Symbol	Parameter	Test Condition	KS4630HA			Unit	
			Min.	Typ.	Max.		
Static Characteristics							
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _{DS} =250μA	N	40			V
		V _{GS} =0V, I _{DS} =-250μA	P	-40			
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =40V, V _{GS} =0V	N			1	μA
				T _J =125°C			
		V _{DS} =-40V, V _{GS} =0V	P			-1	
				T _J =125°C			
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _{DS} =250μA	N	1.1	1.5	2.1	V
		V _{DS} =V _{GS} , I _{DS} =-250μA	P	-1.1	-1.5	-2.1	
I _{GSS}	Gate Leakage Current	V _{GS} =±20V, V _{DS} =0V	N			±100	nA
		V _{GS} =±20V, V _{DS} =0V	P			±100	
R _{DS(ON)} ^⑤	Drain-Source On-state Resistance	V _{GS} =10V, I _{DS} =6A	N		18	25	mΩ
		V _{GS} =-10V, I _{DS} =-6A	P		45	55	
		V _{GS} =4.5V, I _{DS} =4A	N		24	35	
		V _{GS} =-4.5V, I _{DS} =-4A	P		60	75	
Diode Characteristics							
V _{SD} ^⑤	Diode Forward Voltage	I _{SD} =6A, V _{GS} =0V	N		0.83	1.2	V
		I _{SD} =-6A, V _{GS} =0V	P		-0.89	-1.2	
t _{rr}	Reverse Recovery Time	N-Channel I _{SD} =6A, dI _{SD} /dt=100A/μs	N		14		ns
			P		19		
Q _{rr}	Reverse Recovery Charge	P-Channel I _{SD} =-6A, dI _{SD} /dt=100A/μs	N		27		nC
			P		31		
Dynamic Characteristics ^⑥							
R _G	Gate Resistance	V _{GS} =0V, V _{DS} =0V, F=1MHz	N		1.2		Ω
			P		4.5		
C _{iss}	Input Capacitance	N-Channel V _{GS} =0V, V _{DS} =20V, Frequency=1.0MHz	N		355		pF
			P		765		
C _{oss}	Output Capacitance		N		60		
			P		85		
C _{rss}	Reverse Transfer Capacitance	P-Channel V _{GS} =0V, V _{DS} =-20V, Frequency=1.0MHz	N		30		
			P		55		


Electrical Characteristics ($T_A=25^{\circ}\text{C}$ Unless Otherwise Noted)

Symbol	Parameter	Test Condition	KS4630HA			Unit
			Min.	Typ.	Max.	
Dynamic Characteristics ^⑥						
t _{d(ON)}	Turn-on Delay Time	N-Channel V _{DD} =20V, I _{DS} =6A, V _{GEN} =10V, R _G =3Ω	N		5	ns
t _r	Turn-on Rise Time		P		6	
			N		7	
t _{d(OFF)}	Turn-off Delay Time		P		10	
		N		13		
t _f	Turn-off Fall Time	P		26		
		N		5		
		P		16		
Gate Charge Characteristics ^⑥						
Q _g	Total Gate Charge	N-Channel V _{DS} =20V, V _{GS} =10V, I _{DS} =6A	N		7	nC
Q _{gs}	Gate-Source Charge		P		15	
		N		2.3		
Q _{gd}	Gate-Drain Charge	P-Channel V _{DS} =-20V, V _{GS} = -10V, I _{DS} =-6A	P		3.6	
		N		2.9		
		P		4.1		

- Notes:
- ① Pulse width limited by safe operating area.
 - ② Calculated continuous current based on maximum allowable junction temperature.
 - ③ When mounted on 1 inch square copper board, $t \leq 10\text{sec}$. The value in any given application depends on the user's specific board design.
 - ④ Limited by T_{Jmax} . Starting $T_J = 25^{\circ}\text{C}$, N Channel: $L = 0.5\text{mH}$, $R_G = 25\Omega$, $I_{AS} = 7\text{A}$, $V_{GS} = 10\text{V}$, P-Channel: $L = 0.5\text{mH}$, $R_G = 25\Omega$, $I_{AS} = -8\text{A}$, $V_{GS} = -10\text{V}$, Part not recommended for use above this value.
 - ⑤ Pulse test; Pulse width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$.
 - ⑥ Guaranteed by design, not subject to production testing.

Ordering and Marking Information

Device	Package	Packaging	Quantity	Reel Size	Tape width
KS4630HA	SOP8	Tape&Reel	3000	13"	12mm





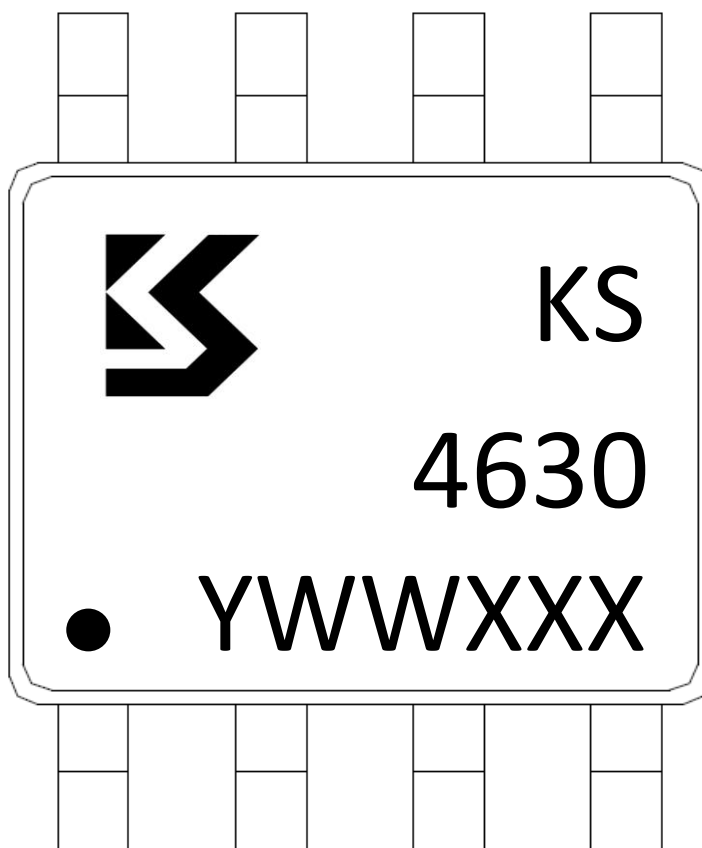


1st Line: Kwansemi LOGO, Kwansemi Code(KS)







2nd Line: Part Number(4630)

3rd Line: Lot Number(YWWXXX)






Typical Characteristics(N-Channel)

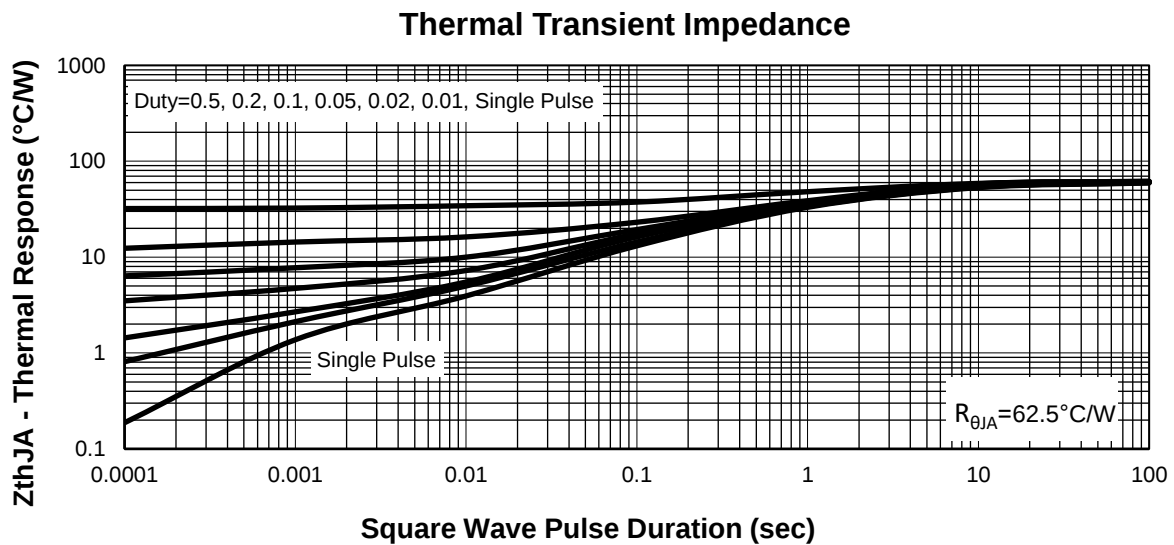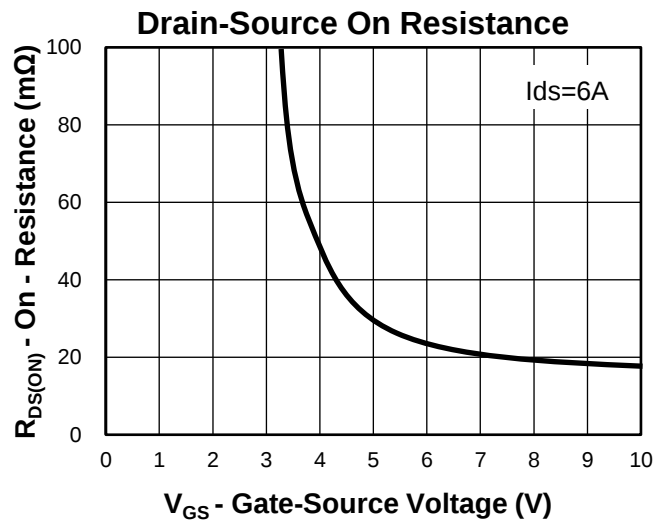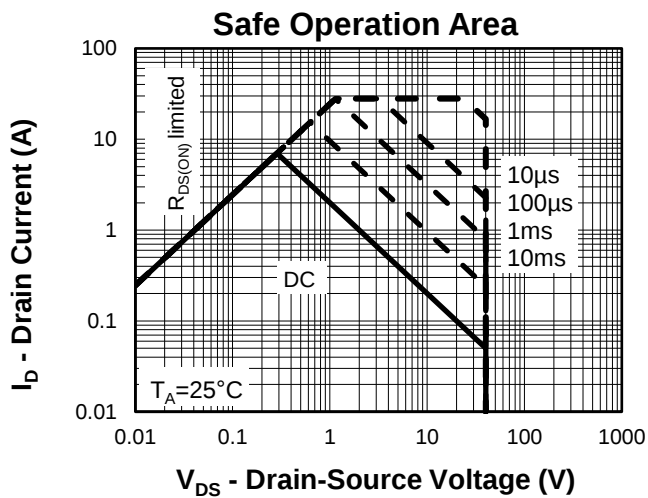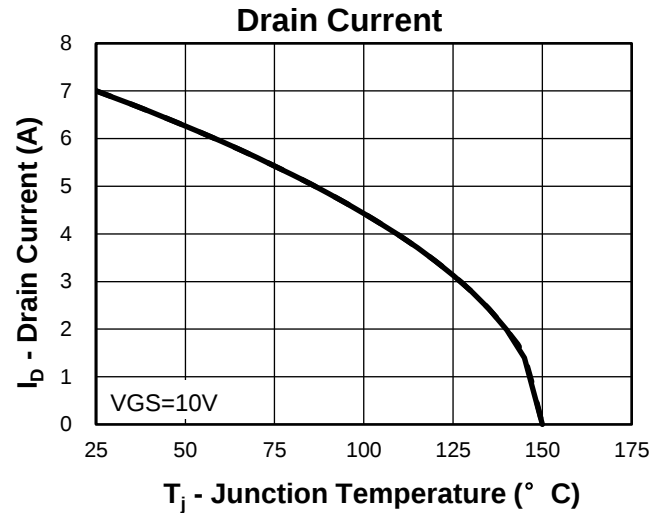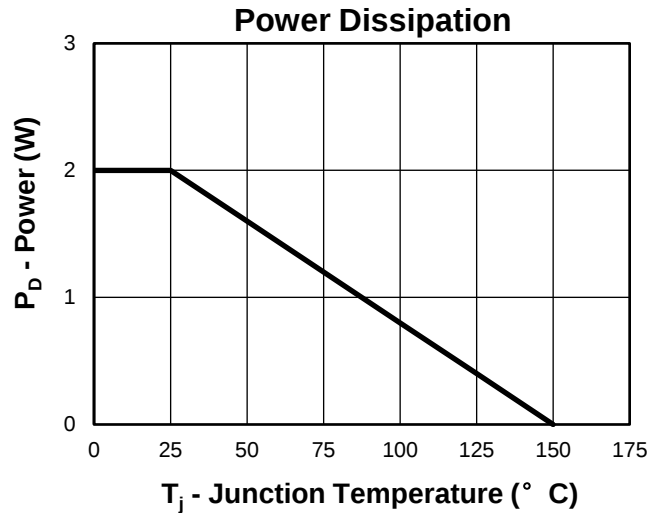







Typical Characteristics(N-Channel)

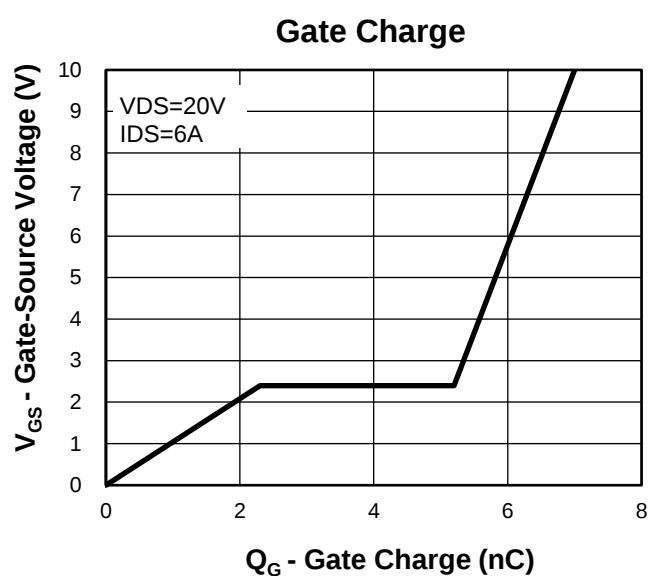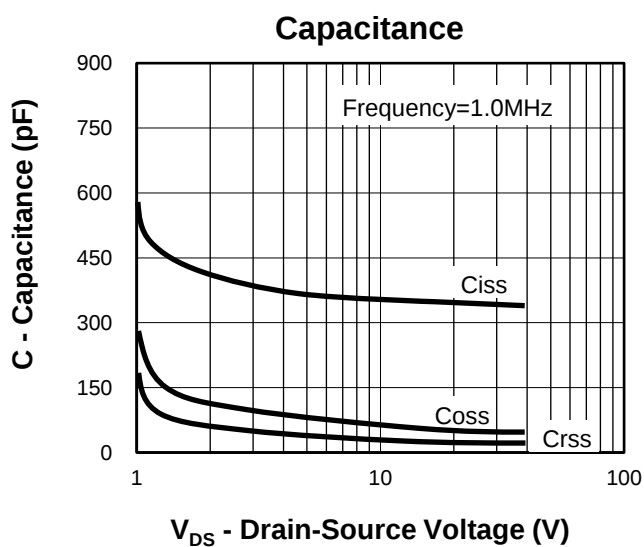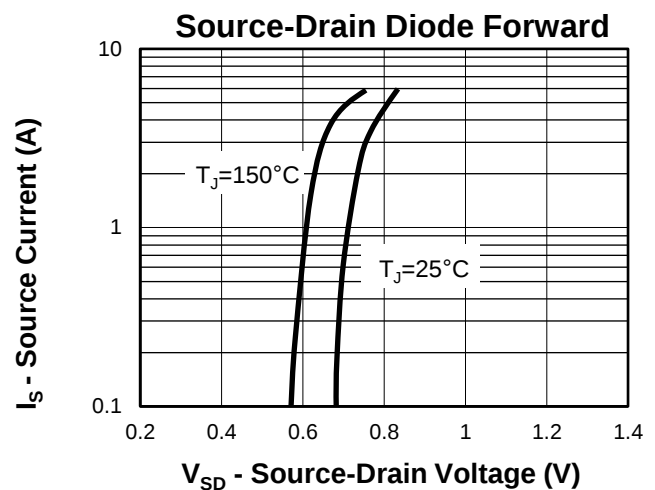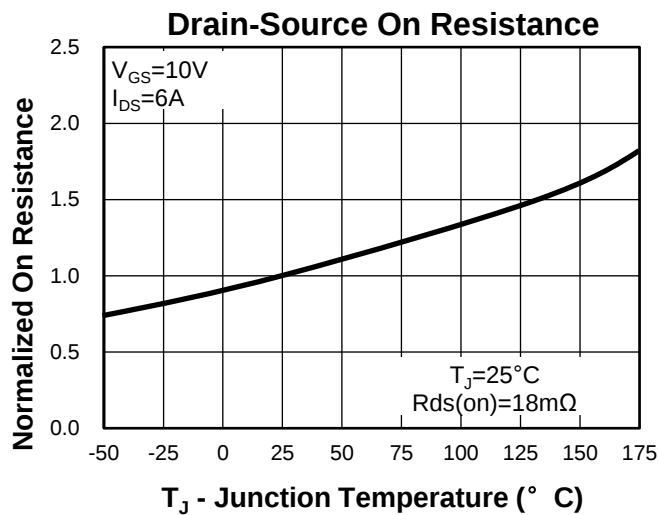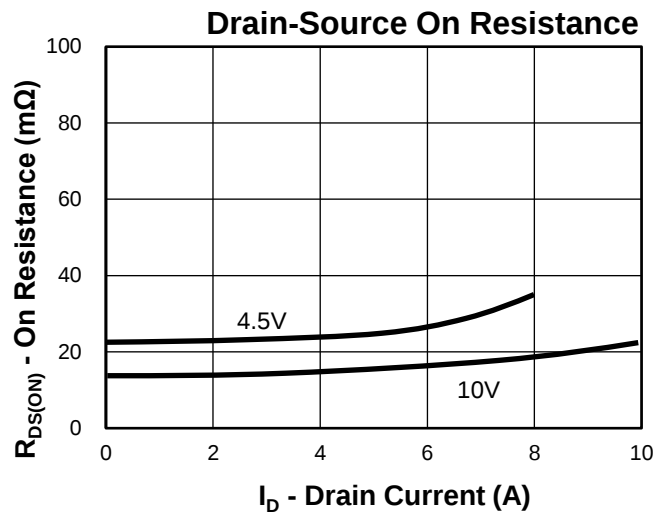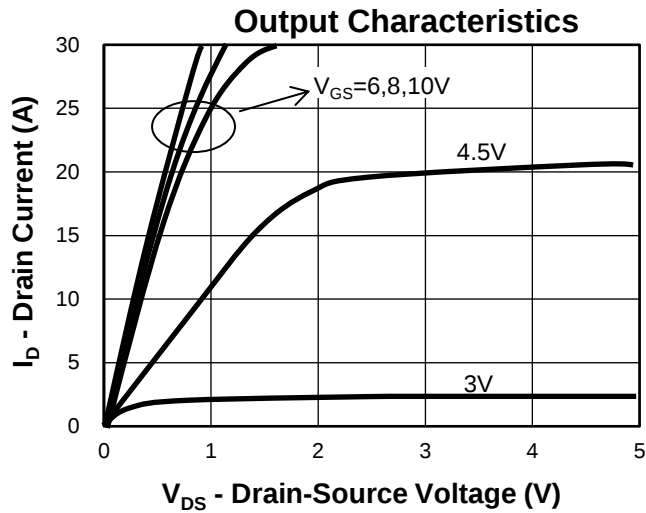


Typical Characteristics(P-Channel)

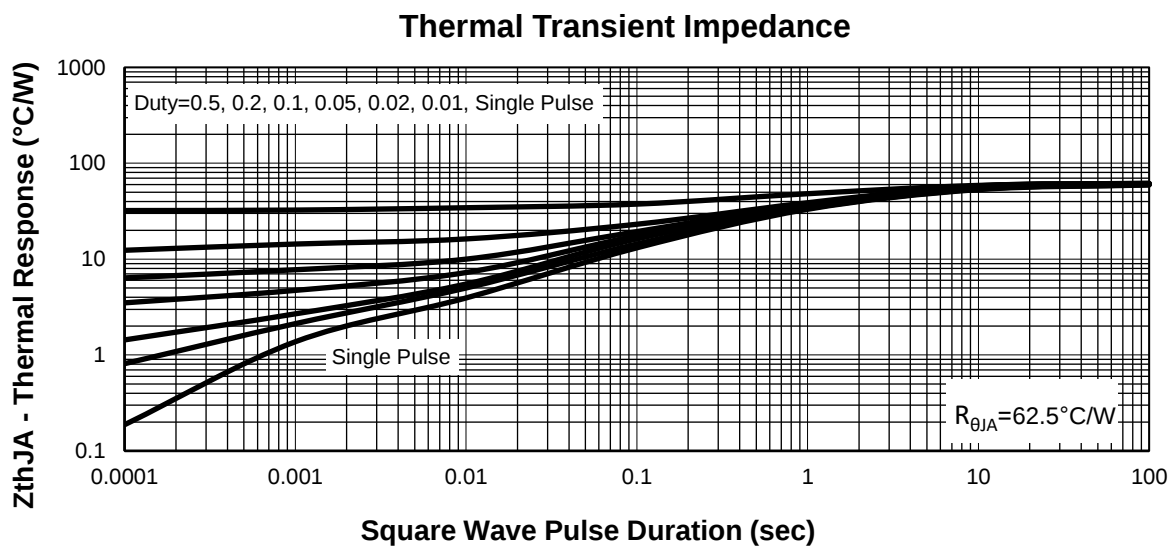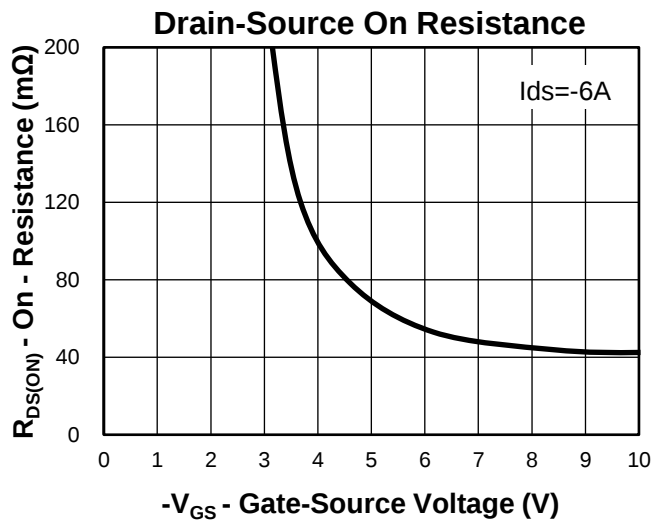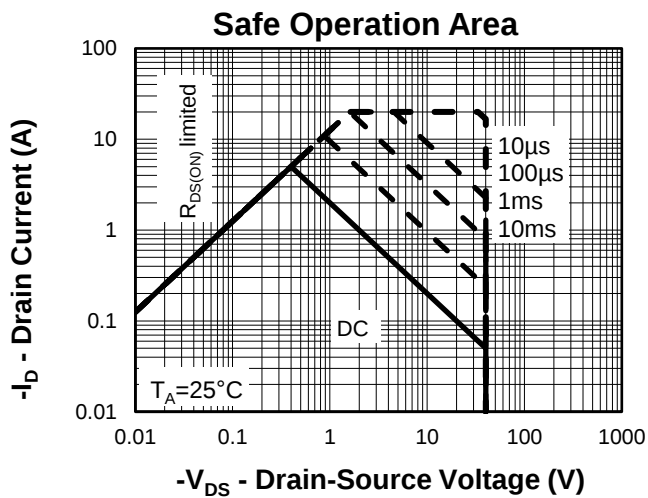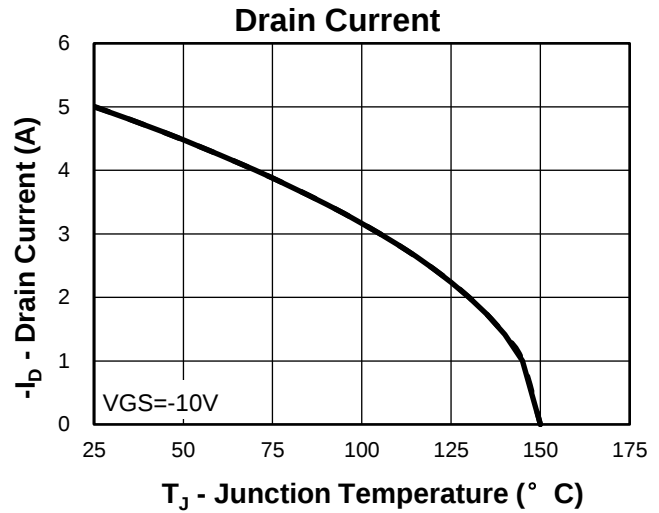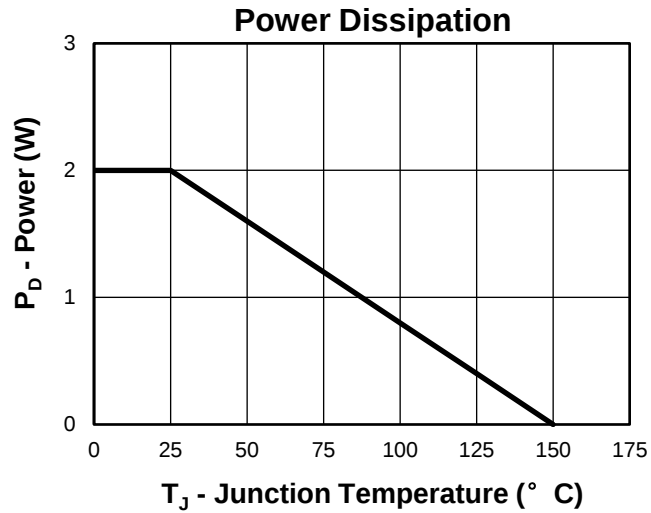


Typical Characteristics(P-Channel)

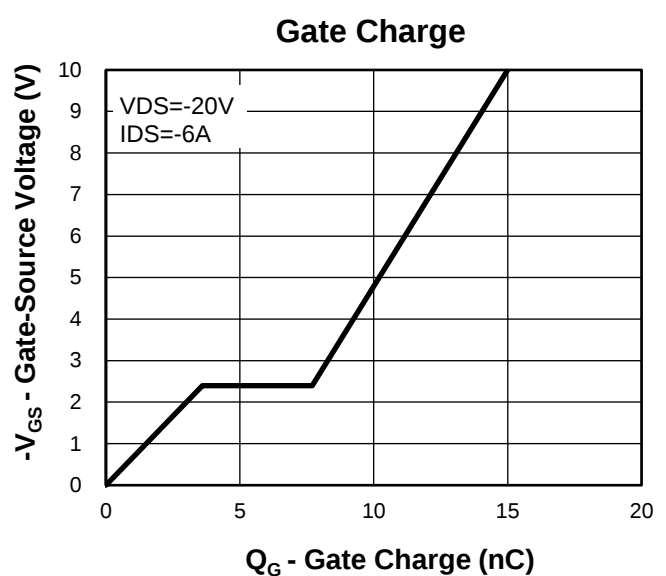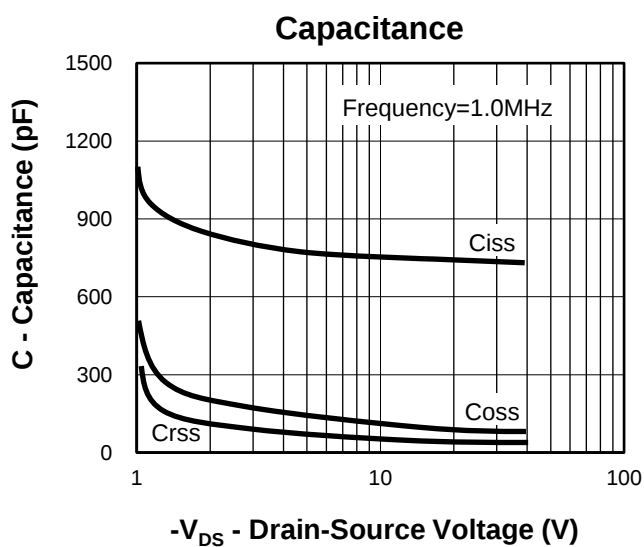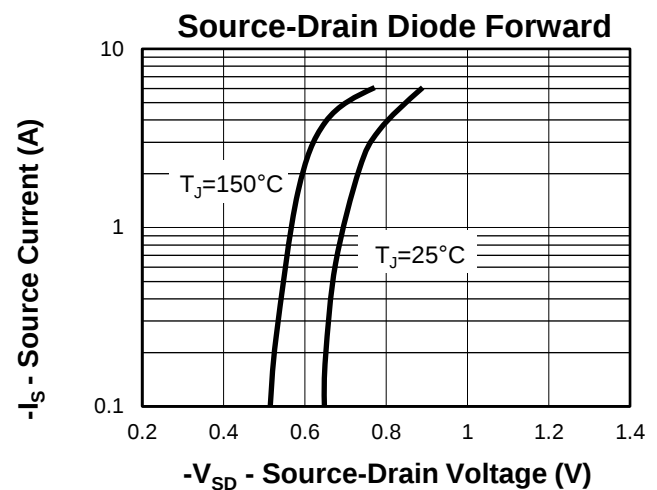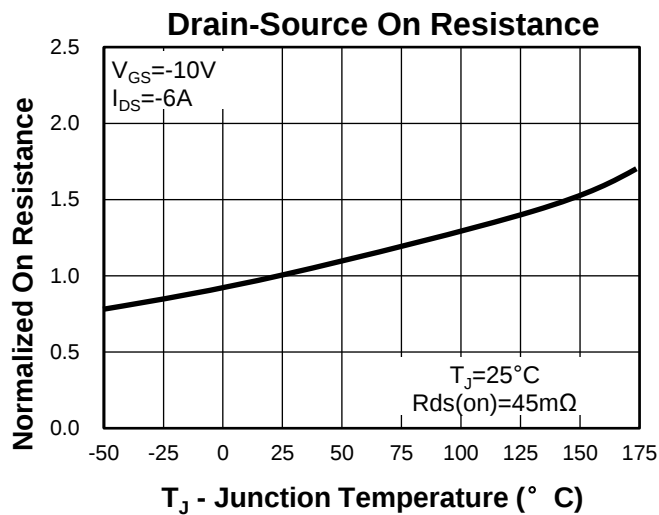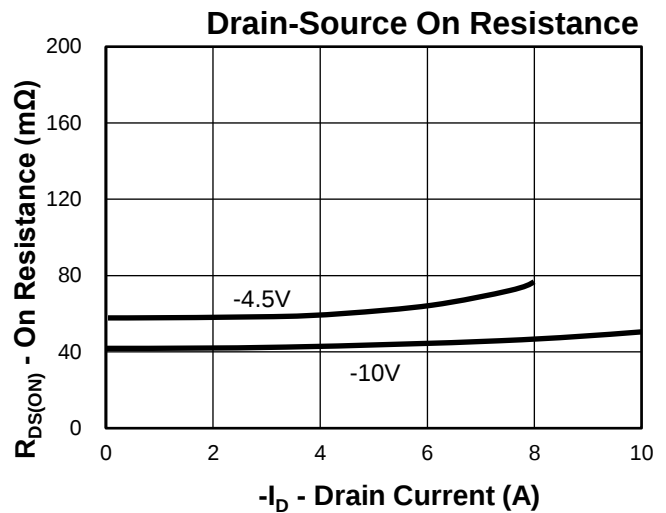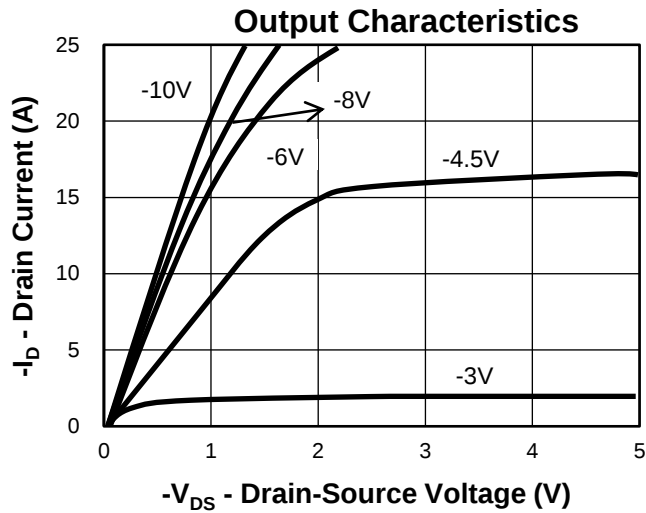

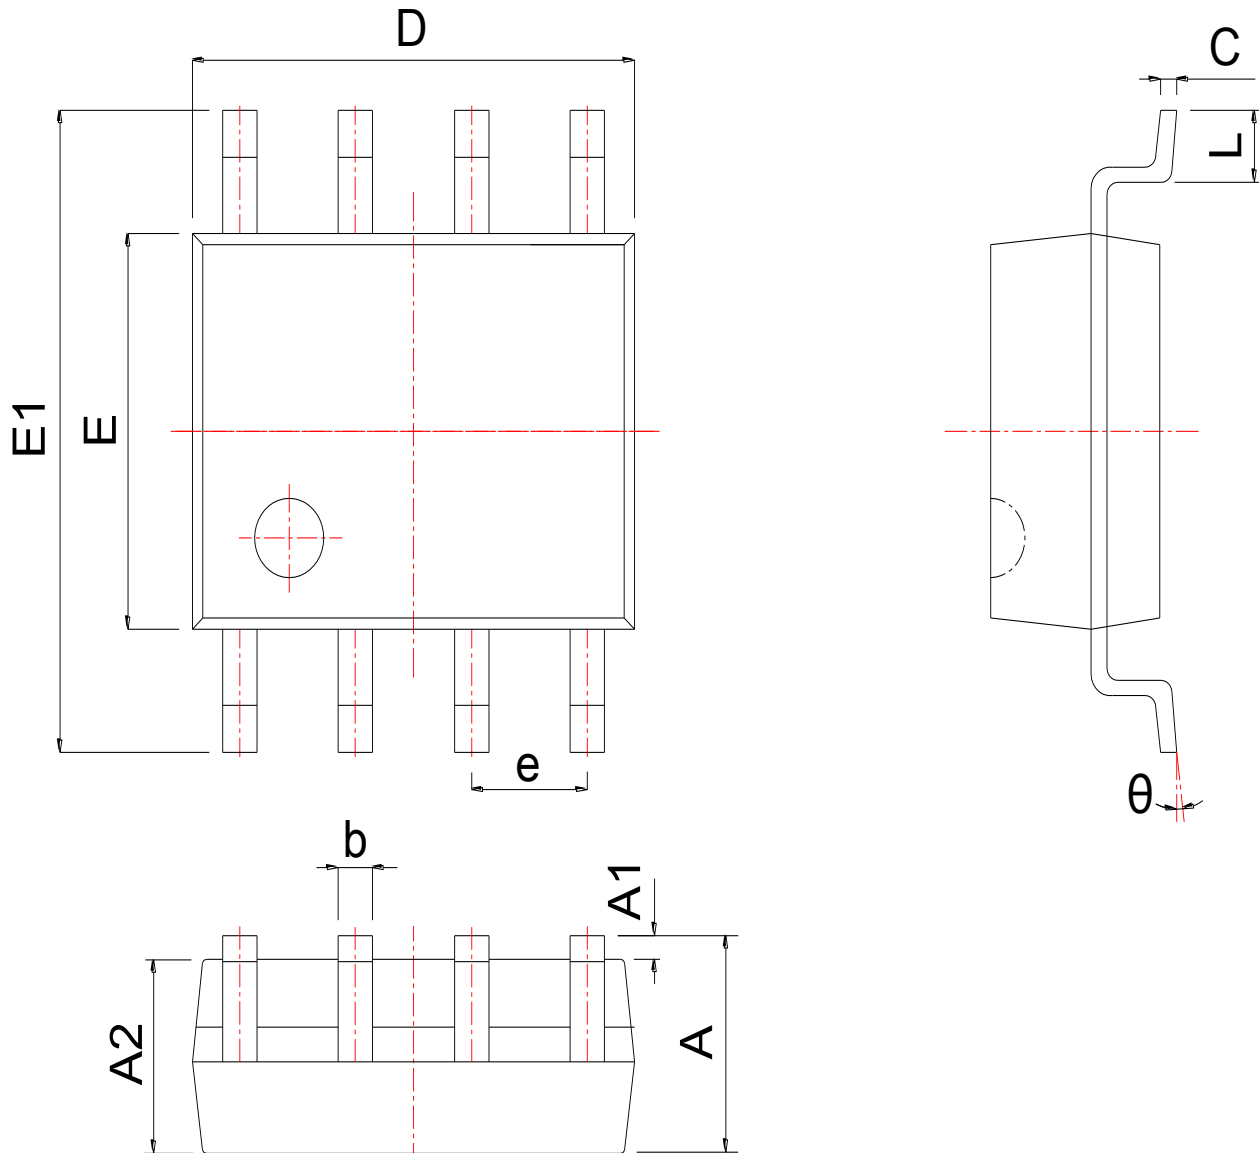
Package Information
SOP8


SYMBOL	MM			INCH		
	MIN	NOM	MAX	MIN	NOM	MAX
A	1.300	1.525	1.750	0.051	0.060	0.069
A1	0.050	0.150	0.250	0.002	0.006	0.010
A2	1.350	1.450	1.550	0.053	0.057	0.061
b	0.330	0.420	0.510	0.013	0.017	0.020
c	0.170	0.210	0.250	0.007	0.008	0.010
D	4.700	4.900	5.100	0.185	0.193	0.201
E	3.800	3.900	4.000	0.150	0.154	0.157
E1	5.800	6.000	6.200	0.228	0.236	0.244
e	1.270 BSC			0.050 BSC		
L	0.400	0.835	1.270	0.016	0.033	0.050
θ	0°		8°	0°		8°


Avalanche Test Circuit and Waveforms(N-Channel)

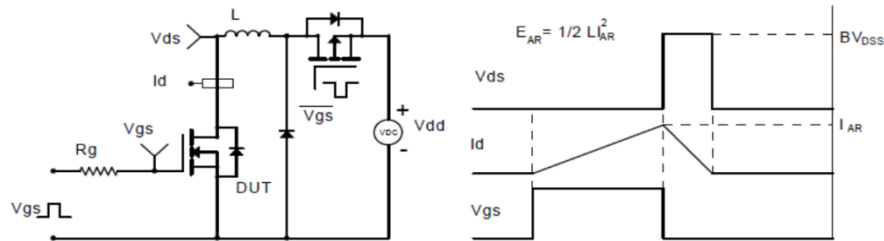


Switching Time Test Circuit and Waveforms(N-Channel)

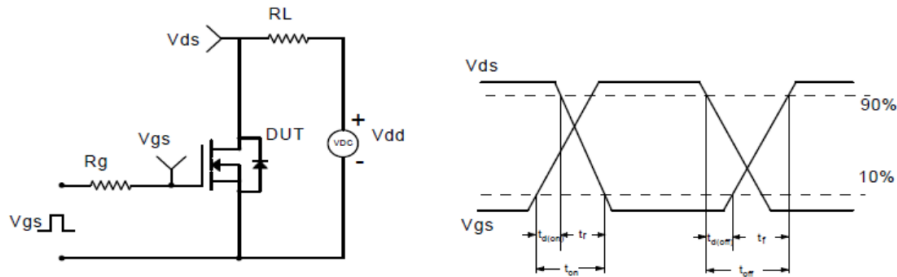


Diode Recovery Test Circuit and Waveforms(N-Channel)

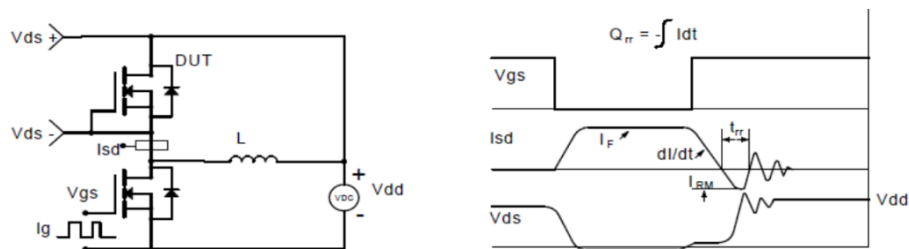


Gate Charge Test Circuit and Waveform(N-Channel)

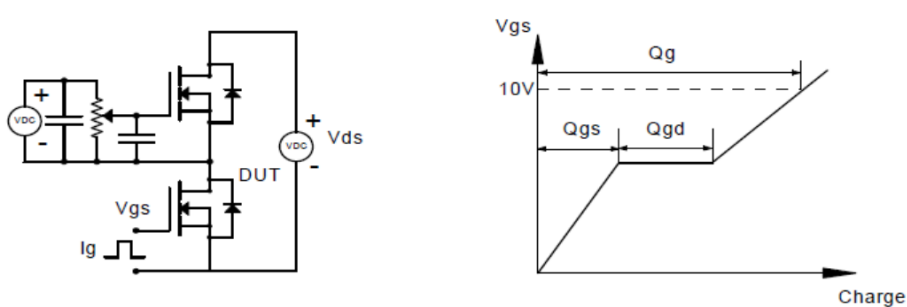


Avalanche Test Circuit and Waveforms(P-Channel)

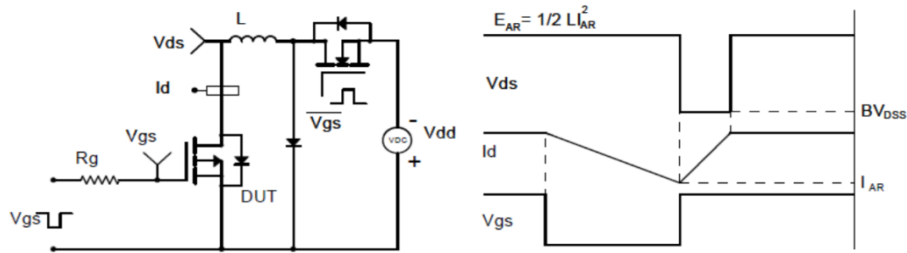


Switching Time Test Circuit and Waveforms(P-Channel)

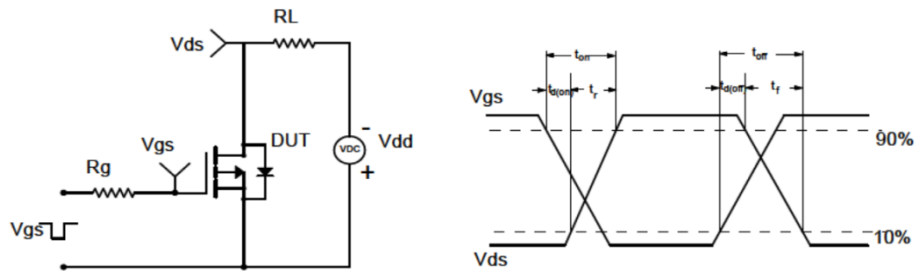

Diode Recovery Test Circuit and Waveforms(P-Channel)

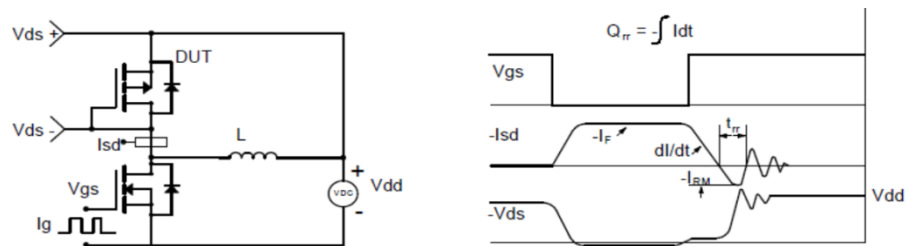

Gate Charge Test Circuit and Waveform(P-Channel)

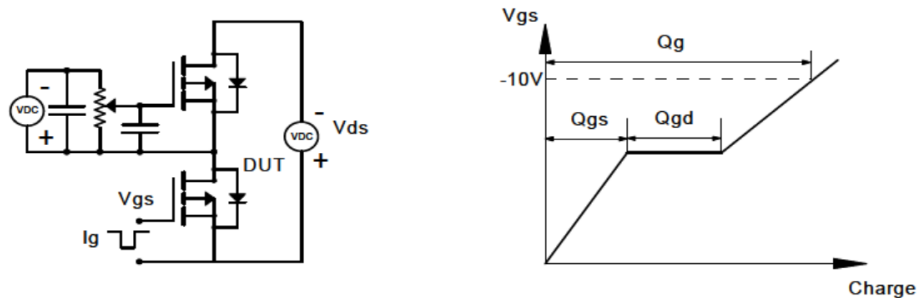

Customer Service

Kwansemi Semiconductor Co.,Ltd

Email:Sales@kwansemi.com

Web:www.kwansemi.com

DISCLAIMER:

Kwansemi reserves the right to change the specifications and circuitry without notice at any time. The Products are not designed for use in hostile environments, including, without limitation, aircraft, nuclear power generation, medical appliances, and devices or systems in which malfunction of any Product can reasonably be expected to result in a personal injury. Seller's customers using or selling Seller's products for use in such applications do so at their own risk and agree to fully defend and indemnify Seller.